
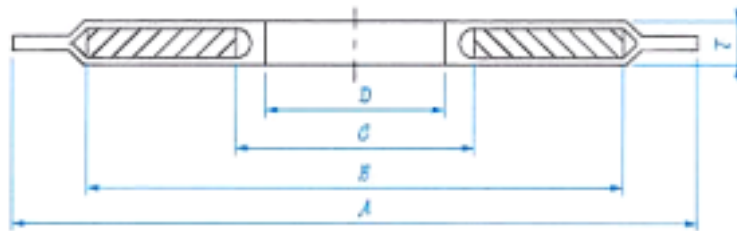


# TEFPASS<sup>®</sup>-G Gasket

- ❁ TEFPASS-G Modified PTFE encapsulated gasket is smoother than PTFE. This smooth surface is able to prevent any contamination.
- ❁ Modified PTFE has excellent high purity property and excellent chemical resistance.
- ❁ Modified PTFE has denser polymer structure, which reduce permeability.
- ❁ Internal gasket material is totally sealed up and protected by Modified PTFE. It won't only pollute delivering chemicals inside pipes. But also avoid gasket material polluting outside pipes.

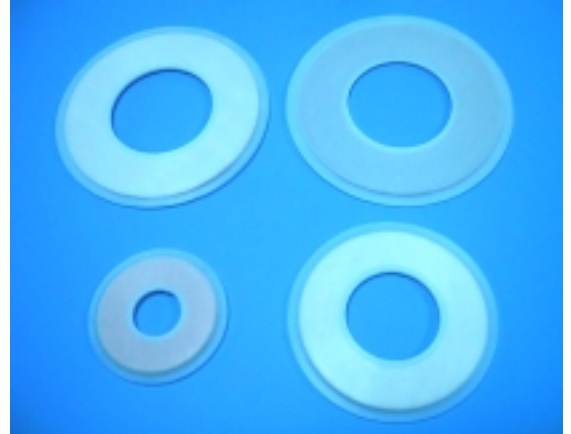

## Specification

unit: mm

Nominal Size		ANSI 150 LBS					JIS 10K				T		
INCH	MM	Part No.	A	B	C	D	Part No.	A	B	C	D	Standard	Heavy
1/2"	15A	G-1/2"	43	33	16	12	G-15	54	44	16	12	3	3.8
3/4"	20A	G-3/4"	54	44	22	18	G-20	54	44	22	18	3	3.8
1"	25A	G-1"	62	52	27	23	G-25	71	61	27	23	3	3.8
1-1/2"	40A	G-1-1/2"	82	72	41	37	G-40	82	72	41	37	3	3.8
2"	50A	G-2"	101	91	53	49	G-50	101	91	53	49	3	3.8
2-1/2"	65A	G-2-1/2"	119	109	66	62	G-65	119	109	66	62	3	3.8
3"	80A	G-3"	131	121	78	74	G-80	131	121	78	74	3	3.8
4"	100A	G-4"	170	160	102	98	G-100	160	150	102	98	3	3.8
6"	150A	G-6"	218	208	151	147	G-150	218	208	151	147	3	3.8

TEFPASS is a registered trademark of Allied Supreme Corp.



4FL., NO.12, MING-TSU E.RD.,

TAIPEI, TAIWAN, R.O.C.

TEL: +886-2-2597-6222(REP)

FAX: +886-2-2595-5626